



it en

[CONTACTS](#) [NEWS](#) [CONCEPT](#) [BENEFITS](#) [PRODUCTS](#) [HOME](#)


Home » Products

[Freedom](#) | [Beauty](#) | [Pretty](#) | [Jump](#) | [Accessories](#)

PRETTY


Kit for opening swinging gates

24 Vdc electromechanical operator with built-in control panel for the automation of swinging gates up to 1.8 m long. Suitable for the automation of gates featuring large columns. The system may be activated even in the absence of **electric power**, thanks to battery operation. Anti-shear articulated arm and a compact and **functional design** that allows adaptation to any architectural context.

[Download pdf](#)


TECHNICAL DATA

Power supply: 230 Vac
Motor supply: 24 Vdc
Absorbed power: 75 W
Max. absorbed current: 0.6 A 3 A
Torque: 120 N m
Opening time: 10 seconds
Operation cycle: intensive use
Protection level: IP 44
Mechanical stop: adjustable in opening
Operating temperature: -20°C/+70°C
Lubrication: grease
Weight: 7,9 Kg
Buil in control unit: yes - no

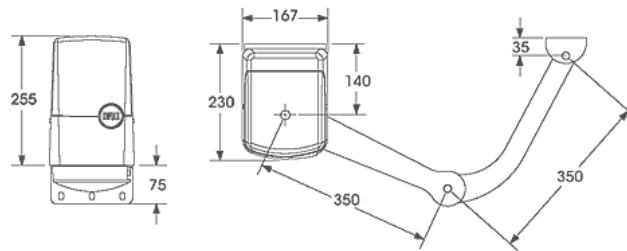

PRETTY KIT

Pretty is characterised by a robust anti-shear arm and by the possibility of unlocking with a key. Simple and easy to install, it adapts to any architectural context. Essential **design** and lines.

Possibility of battery operation in the absence of electric power.

IN THE BOX

- 2 24 Vdc Operators with control unit and built-in receiver
- 1 Pair of photocells
- 1 24 Vdc Flashing light with built-in aerial
- 1 Key selector
- 2 Transmitters
- 1 Warning board



ACCESSORI



BY

The transmitter, with a simple but innovative design, allows programming of the system functions using the keys and dialogue with the display of the motor control panels.



P.BY

BYOU photocell for fitting outdoors. Design and technology to satisfy dual requirements, safety and energy saving.



F.BY

Flashing light BYOU 433.92 MHz with built-in aerial. Decisive lines for a flashing light with a unique design.



K.BY

Selector for outdoor installation.



Ecological respect



Energy saving



Time saving